

TURNBUCKLES

Closed Body with Fork and Fork


Benefits

Stainless steel grade 316 closed body with Aluminium Bronze thread inserts for sizes 8mm to 26mm.

Sizes above 26mm wire rope also available on request.

All raw materials used to manufacture these parts are certified to EN10204 3.1b.

Inspection certificate BS EN 10204 3.1B available on request (This must be specified at the time of order).

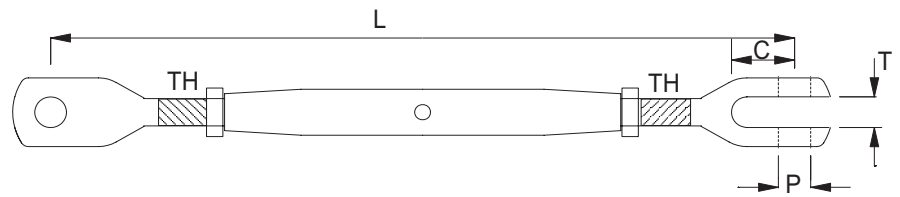

Closed Body Turnbuckle with Fork and Fork

Product Code	Wire	Thread	P	C	T	Min L	Max L	Weight
RSFF03	3mm	1/4" unf	6.0mm	12.5mm	6.2mm	135mm	205mm	80g
RSFF04	4mm	5/16" unf	8.0mm	17.0mm	7.9mm	165mm	240mm	170g
RSFF05	5mm	3/8" unf	9.5mm	19.0mm	9.9mm	200mm	300mm	282g
RSFF06	6mm	7/16" unf	11.0mm	20.0mm	9.5mm	220mm	330mm	398g
RSFF07	7mm	1/2" unf	12.0mm	25.0mm	12.7mm	260mm	390mm	614g
RSFF08	8mm	5/8" unf	14.0mm	28.0mm	13.5mm	325mm	480mm	1260g
RSFF10	10mm	5/8" unf	16.0mm	32.0mm	15.8mm	145mm	500mm	1434g
RSFF12	12mm	3/4" unf	19.0mm	38.0mm	17.8mm	400mm	570mm	2418g
RSFF14	14mm	7/8" unf	22.0mm	45.0mm	22.0mm	450mm	640mm	3577g
RSFF16	16mm	1" unf	25.4mm	50.0mm	25.0mm	520mm	760mm	5340g
RSFF19	19mm	1 1/8" unf	28.0mm	58.0mm	28.2mm	585mm	855mm	5618g
RSFF22	22mm	1 1/4" unf	32.0mm	64.0mm	31.8mm	635mm	920mm	7711g
RSFF26	26mm	1 3/8" unf	35.0mm	70.0mm	34.8mm	715mm	1040mm	14085g

Threaded ends can be purchased separately - Forks, Eyes, Compression Studs, Swage Studs, Toggles and Shackle Toggles.

All Hi-MOD products are produced to a high degree of quality control, using modern lean manufacturing processes, resulting in a reliable and consistent product